

**Compliance Testing Report for
Australian/New Zealand Standards
AS/NZS 60598.1:2003 and
AS/NZS 60598.2.2:2001
Luminaires
Part 2.2: Particular Requirements — Recessed Luminaires
(Limited Testing Only)**

Client:	Efficiency Matrix
Address:	14 Ondine Drive, Wheelers Hill, Victoria 3150
Report Number:	1104EFFHAL_59822 (Replacement for report no. 1030EFFHAL_59822)
Date of Testing:	27 – 28 October 2009
File Number:	EFF091022
Equipment Name:	Halogen Mitt
Equipment Model Number:	Halmitm2
Equipment Description:	Halogen Mitt
Result:	COMPLIES
Tested by:	Hai Ying Qiu Electrical Safety Test Engineer
Approved by:	Kenneth Fu Electrical Safety Manager
Date of issue	04 November 2009

Results appearing herein relate only to the sample(s) tested.
This report may not be reproduced in any form unless done so in full.
Original copies of reports are printed on Austest Laboratories official Test Report letterhead, printed in reflex blue.
This report is issued errors and omissions exempt and is subject to withdrawal at Austest Laboratories discretion.

SUMMARY OF COMPLIANCE WITH AUSTRALIAN AND NEW ZEALAND STANDARDS AS/NZS 60598.1: 2003 AND AS/NZS60598.2.2: 2001

The EUT (Equipment Under Test) known as Halogen Mitt, model number Halmitm2, was supplied for AS/NZS 60598.1: 2003 and AS/NZS60598.2.2: 2001 testing by Efficiency Matrix of 14 Ondine Drive, Wheelers Hill, Victoria 3150.

This report is the replacement report for the test report no. 1030EFFLED_59822 to include the Brand name and thickness of R5 thermal insulation.

The EUT was tested to clause 12.4 of AS/NZS 60598.1: 2003 and clause 2.12 of AS/NZS 60598.2.2: 2001 for surrounding parts only (timber and fibre glass batt R5)

When the EUT was tested in conjunction with timber and fibre glass batt R5 as the surrounding parts, the EUT COMPLIES with the tested clause 12.4 of AS/NZS 60598.1:2003 and clause 2.12 of AS/NZS60598.2.2:2001.

Hence there is no restriction for installation of the Halogen Mitt around timber and fibre glass batt R5 as per the Australian Wiring Rules, AS/NZS 3000:2007 clause 4.5.2.3.

Method

Testing was performed in accordance with the standard:
60598.1man

Possible Test Case Verdicts:

- test case does not apply to the test objectN(.A)
- test object does meet the requirementsP(ass)
- test object does not meet the requirementsF(ail)
- test was not performedNT(not tested)
- notedND

Doc Id: AS/NZS 60598.2.2

Page 3 of 8

Report No.: 1104EFFHAL_59822

AS/NZS60598.2.2: 2001			
Clause	Requirement - Test	Result - Remark	Verdict

2.12 (12)	ENDURANCE TEST AND THERMAL TEST		
2.12 (12.4)	Thermal test (normal operation)	Refer to appended tables	P

12.4	TABLE: temperature rise measurements for normal operation		P
	test voltage (V)	254.4	—
Temperature (⁰ C) of part		T (⁰ C)	Max. T (⁰ C)
Surrounding parts of heat shield construct of timber ^{A)}			
Timber		28.8	90
Inside the Mitt		65.2	Reference
Ambient		21	Reference
Surrounding parts of heat shield construct of fibre glass batt R5 ^{B)}			
Fibre glass batt R5		75.4	90
Inside the Mitt		84.1	Reference
Ambient		22	Reference
^{A)} 100mmX100mm timber side pieces were fitted as close as possible against four sides of the insulation Mitt. The thermocouples were placed on the timbers near the insulation Mitt where temperature expected to be highest. ^{B)} The 100mmX100mm timber side pieces were removed and replaced with thermal insulation in direct contact with the full circumference of the insulation Mitt. The thermocouples were placed on the thermal insulation near the insulation Mitt where temperature expected to be highest.			

***** END OF REPORT BODY *****

Appendix 1 – Critical Component List

Appendix 2 – Photographic Record of Sample



Appendix 1 – Critical Component List

Appendix 1		TABLE: Components				P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity	
Safety isolating transformer	ATCO	TM50-2	Pri: 240V~ 50Hz Sec: 12V	AS/NZS 61558	V99	
Halogen Lamp	Megalite	MR-16	12V 35W	-	-	
Plug	Powermaster	MP3	250VAC	-	Q01734	
Power cord	Powermaster	GD-3	3X0.75mm ²	-	N18155	
Ceiling Batt R5.0	Insulco	201504	Thickness 215mm	-	-	
¹⁾ An asterisk indicates a mark which assures the agreed level of surveillance						

Appendix 2 – Photographic Record of Sample



Appendix 2 – Photographic Record of Sample

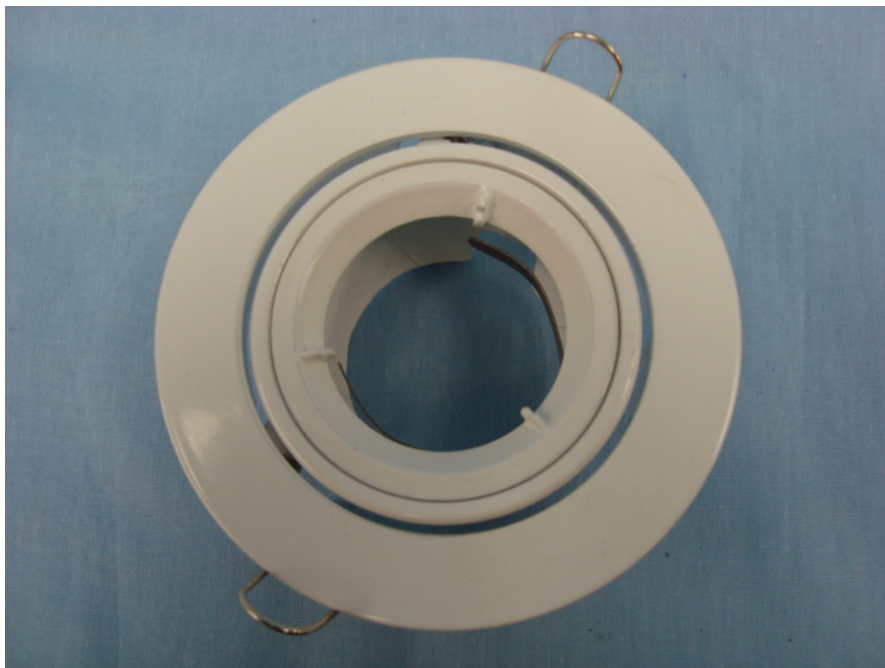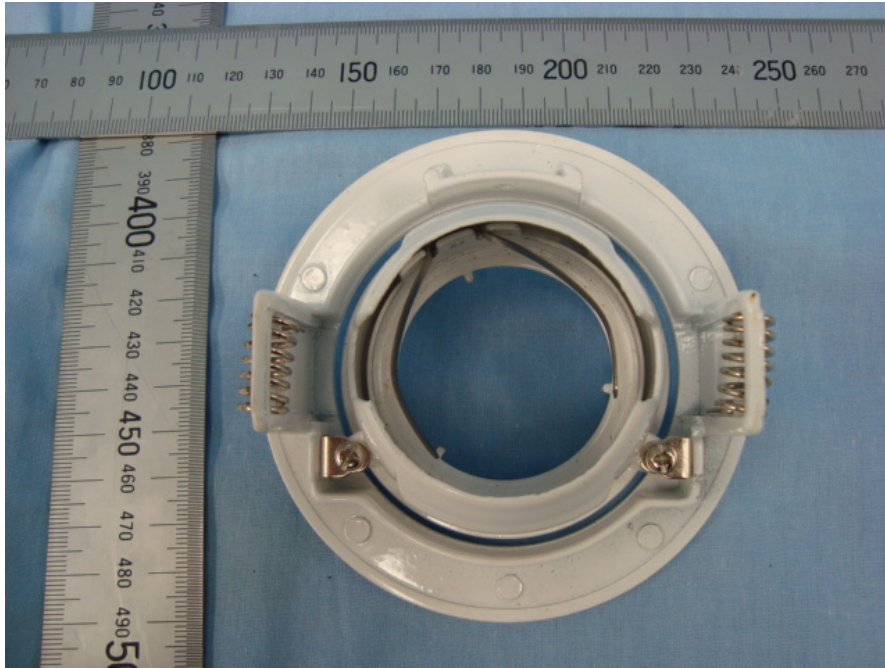

Appendix 2 – Photographic Record of Sample



Appendix 2 – Photographic Record of Sample

